



Mega System Technologies Inc.

2F, No. 41, Lane 76, RuiGuang Road,
NeiHu 11491, Taipei, Taiwan R.O.C.
Tel.: +8862-8792-2060, Fax.: +8862-8792-2066
Web: www.MegaTec.com.tw
email: sales@MegaTec.com.tw


New
Model

NetAgent9

The Trusted & Reliable Solution for your UPS!

Features:

- Comprehensive UPS management with flexible configuration via Web Browser, NMS, Telnet or SNMP
- Support advance encryption: HTTPS, SSL, SSH, SNMPv3
- Centralized authentication by Radius
- Event notification via Email, SMS or Trap
- Support 'environment monitoring' with temperature, humidity water presence, smoke and door/window sensor
- Support USB Wifi 802.11b/g, USB flash disk / external USB HDD, compatible USB camera & more...
- Support UPS MIB, RFC1628, PPC MIB
- Support GPRS modem
- Multi-language user interface
- Real-time UPS monitoring
- Schedule periodic UPS self-test
- Record event / data log
- Graceful multi-server shutdown
- Battery test log

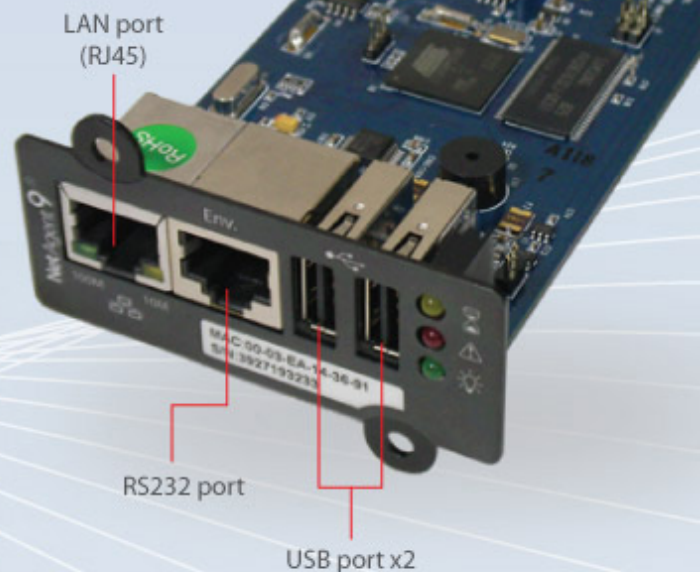

NetAgent9: Web interface

Single Port

Models



Multi Port

Models

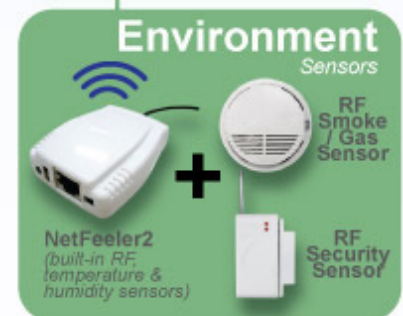
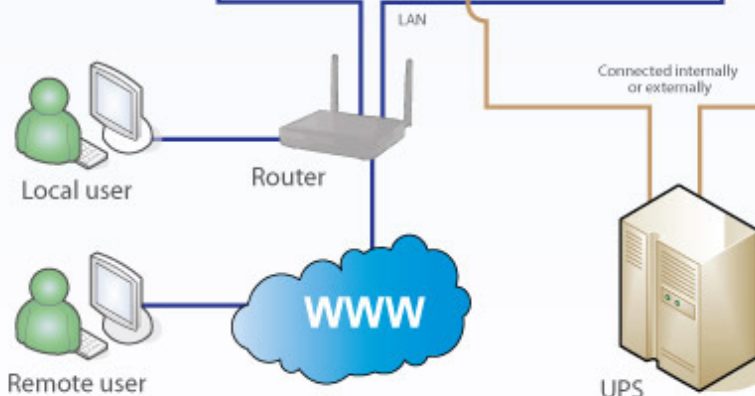
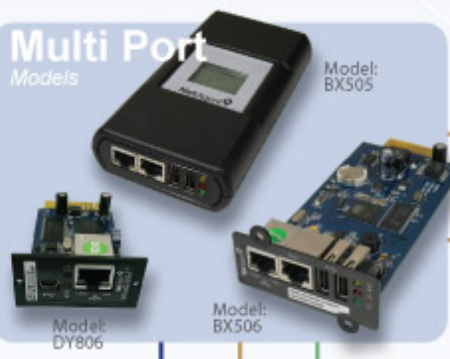




Table of Comparison: NetAgent 9 - CX & DX models

Product Number	CX504	CX503	DX520	DX522	DX532	DX801
CPU	ARM9 180MHz 32Bit					
Port	1 Port					
Flash Memory	8MB					
Web Multi-Language	YES					
Power DC Input	5.3V ~ 40V, 2W Max		5V ~ 7V, 250mA Max			5V ~ 15V, 250mA Max
Watch Dog	YES					
LAN interface	10M/100M UTP					
LAN Protocol	TCP/IP, HTTP, HTTPS, SSL, SSH, SMTP, SNTP, DHCP, Telnet, BOOTP, DNS, DDNS, PPPoE, RADIUS, IPv4, IPv6					
MIB	PPC MIB, RFC1628, SNMPv1, SNMPv2, SNMPv3					
Real Time Clock (RTC)	YES					
MegaTec Protocol						
MegaTec 3 Phase Protocol						
PhoenixTec Protocol						
SEC Protocol						
SEC 3 Phase Protocol						
External Box						
Internal Card / Module						
LCD Panel						
Dimension (mm)	130 x 60	158 x 80	65.5 x 48.5	65 x 45	65 x 45	23 x 47
Product Image						

Table of Comparison: NetAgent II (BT) vs. NetAgent 9 (BX) models

Product Number	BT506	BT505	BX506	BX505
CPU	ARM 50MHz 32Bit		ARM9 180MHz 32Bit	
Port	3 Ports		2 Ports; 2 USB Ports	
Flash Memory	2MB		8MB	
SDRAM	16MB		32MB	
Web Multi-Language	YES			
Power DC Input	5.3V ~ 40V, 2W Max			
Watch Dog	YES			
LAN interface	10M/100M UTP			
LAN Protocol	TCP/IP, HTTP, HTTPS, SSL, SMTP, SNMP, DHCP, Telnet, BOOTP, DNS, DDNS, PPPoE, RADIUS, IPv4		TCP/IP, HTTP, HTTPS, SSL, SSH , SMTP, SNMP, DHCP, Telnet, BOOTP, DNS, DDNS, PPPoE, RADIUS, IPv4, IPv6	
MIB	PPC MIB, RFC1628, SNMPv1		PPC MIB, RFC1628, SNMPv1, SNMPv2 , SNMPv3	
Modem Port	YES		NO	
Environment port	YES (Temperature, Humidity, Smoking, Water, Security)			
Real Time Clock (RTC)	YES			
MegaTec Protocol				
MegaTec 3 Phase Protocol				
PhoenixTec Protocol				
SEC Protocol				
SEC 3 Phase Protocol				
External Box				
Internal Card / Module				
LCD Panel	NO			YES
Dimension (mm)	130 x 60	158 x 80	130 x 60	158 x 80
Product Image				

ClientMate



Performs multi-server shut-down for Windows / Linux / FreeBSD / MAC / VMware / Solaris operating system.

UPSilon2000



Monitors & control RS-232 smart UPS.

RUPS2000



Monitors & control contact-closure UPS



SNMPview: NMS to manage and control multiple UPS



Netility: Locate & configure NetAgent in LAN